

## SPROULE WR-1200 PERLITE PIPE & BLOCK INSULATION

Sproule WR-1200 is a preformed, high-temperature, hydrophobic, non-wicking pipe and block insulation composed of expanded perlite uniformly reinforced with a high strength fiber for use on systems operating up to 1200°F (650°C). It is inorganic, non-combustible and meets or exceeds the physical property requirements of ASTM C610. Sproule WR-1200 is produced with a blue visual color coding dispersed throughout the product to assure it can be identified as asbestos free. Integral to Sproule WR-1200 is the XOX Corrosion Inhibitor®, a distinctive formula and process that inhibits corrosion to outside surfaces of pipe and equipment.

### ADVANTAGES

Pipe insulation sections shrink-wrapped with poly film for protection from abrasion during shipment.

Block insulation manufactured with reinforcing scrim to enhance structural integrity.

### APPLICATIONS

Because of its compressive strength, low thermal conductivity and corrosion-inhibiting properties, it is a product for application on high-temperature piping and equipment. In industrial processing and power generation facilities, Sproule WR-1200 is the preferred product for stainless steel piping, which is very susceptible to stress-corrosion cracking at operating temperatures above 140°F (60°C). The XOX Corrosion Inhibitor inhibits corrosion where moisture and chlorides may become trapped between insulation and stainless steel. Please visit our website at [www.jm.com/industrial](http://www.jm.com/industrial) for specific application information.

### FIRE SAFETY

**Surface Burning Characteristics.** When tested in accordance with ASTM E84, NFPA 255, and UL 723, Sproule WR-1200 has flame spread/smoke developed ratings of 0/0.


**Non Combustible.** When tested in accordance with ASTM E136 as defined by NFPA 255 and NFPA 101.

### AVAILABLE FORMS AND SIZES

Pipe Sizes		Sproule WR-1200
in.	mm	
½-24	15-600	Pipe Insulation**
24-40	600-1000	Quad
30 Min	750 Min	Scored or V-Grooved Block [12" (305 mm) wide]
Flat Surfaces		Flat Block [6" and 12" wide (152 mm and 305 mm wide)]

\*Double-layer pipe insulation is available for heat-traced line applications

Sproule WR-1200 pipe insulation is 36" (914 mm) in length, and is available in thicknesses from 1" to 4" (25 mm to 102 mm) in ½" (15 mm) increments. Thicker walled material is furnished in double layers. Sproule WR-1200 flat block insulation is [6" (152mm) and 12" (305 mm) wide] and 36" (914 mm) in length, and is available in thicknesses from 1" to 4" (25 mm to 102 mm) in ½" (15 mm) increments.

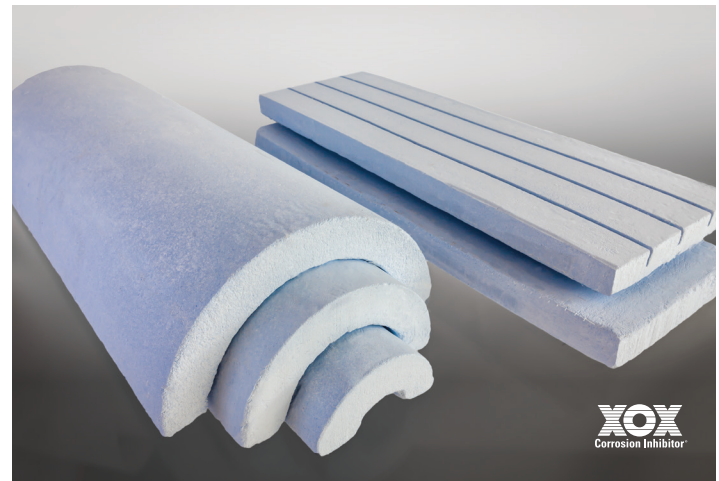

Operating Temperature Limit: 1200°F (650°C)

### SPECIFICATION COMPLIANCE

ASTM C165 Compressive Strength	80 psi (550 kPa) to produce 5% compression
ASTM C203 Flexural Strength	50-60 psi (345-415 kPa)
ASTM C302 Average Density	13 lbs. per cu. ft. (210 kgs./m <sup>3</sup> )
ASTM C356 Linear Shrinkage	Less than 2% after 24-hour soaking period at 1200°F(650°C)
ASTM C442 Maximum Service Temperature	1200°F (650°C)
ASTM C610 Material Specification	Passes
ASTM C665 Corrosivity to Steel	Passes
ASTM C795/C871/C692 Corrosion: Austenitic Stainless Steel	Passes
ASTM C1338 Fungi Resistant	Passes
ASTM C1617 Corrosivity to Steel	Passes
ASTM E84 Surface Burning Characteristics	Flame Spread - 0 Smoke Developed - 0
ASTM E136 Non-Combustible	Passes
NRC Reg. Guide 1.36	Passes
R-Value @ 75°F	2.2 per inch of thickness

### SCORED BLOCK APPLICATION GUIDE

Minimum Diameter					
Insulation Thickness		Triple Scored		Single Scored	
in.	mm	in.	mm	in.	mm
1½	38	30	762	95	2413
2	51	40	1016	125	3175
2½	64	50	1270	155	3937
3	76	60	1524	190	4826
3½	89	70	1778	220	5588
4	102	-	-	250	6350


### PRODUCT CERTIFICATION

When ordering material to comply with any government specification or any other listed specification, a statement of that fact must appear on the purchase order. Government regulations and other listed specifications require specific lot testing, and prohibit the certification of compliance after shipment has been made. There may be additional charges associated with specification compliance testing. Please refer to IND-CSP-3 for Certification Procedures and Charges. Call customer service for more information.

### QUALITY STATEMENT

Johns Manville products are designed, manufactured and tested to strict quality standards in our own facilities. This along with third party auditing is your assurance that this product delivers consistent high quality.

### THERMAL CONDUCTIVITY

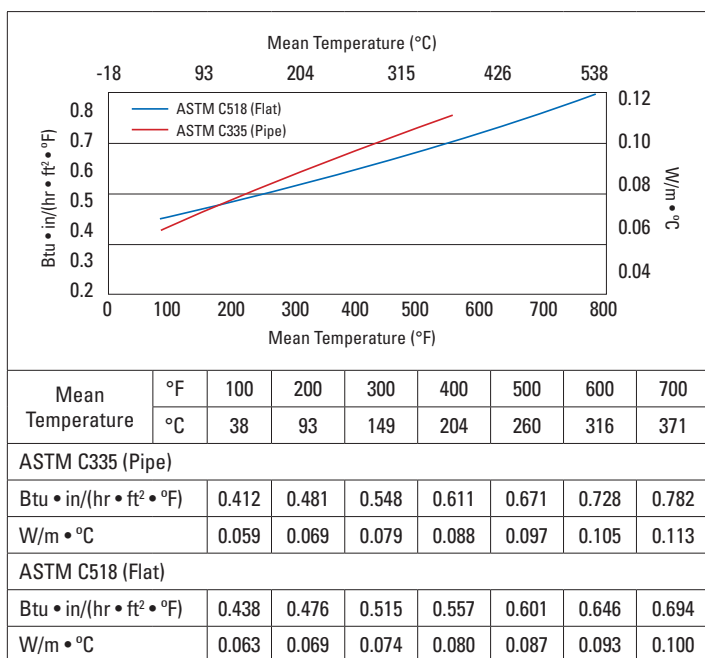

\*Sproule WR-1200 insulation is tested in accordance with ASTM C518 and ASTM C335.

### ADDITIONAL INFORMATION AND SDS

Please visit our website at [www.jm.com/industrial](http://www.jm.com/industrial)  
 Customer Service, Technical & General Information: (800) 866-3234



717 17th St.  
 Denver, CO 80202  
 (800) 866-3234  
 JM.com

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The physical and chemical properties of the Sproule WR-1200® Perlite Pipe & Block Insulation listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Any references to numerical flame spread or smoke developed ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you for current information.

**All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville thermal insulation and systems, visit [www.jm.com/terms-conditions](http://www.jm.com/terms-conditions) or call (800) 654-3103.**